

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 March 2005 (31.03.2005)

PCT

(10) International Publication Number
WO 2005/029394 A2

(51) International Patent Classification⁷: **G06K 11/00**,
G06F 3/033

(21) International Application Number:
PCT/IB2004/051747

(22) International Filing Date:
14 September 2004 (14.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03103488.7 22 September 2003 (22.09.2003) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LANGE, Ruediger,**

J. [DE/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **SCHOELLMANN, Volker** [DE/DE]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


(74) Agent: **ELEVELD, Koop, J.**; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: **LIGHT GUIDE TOUCH SCREEN**

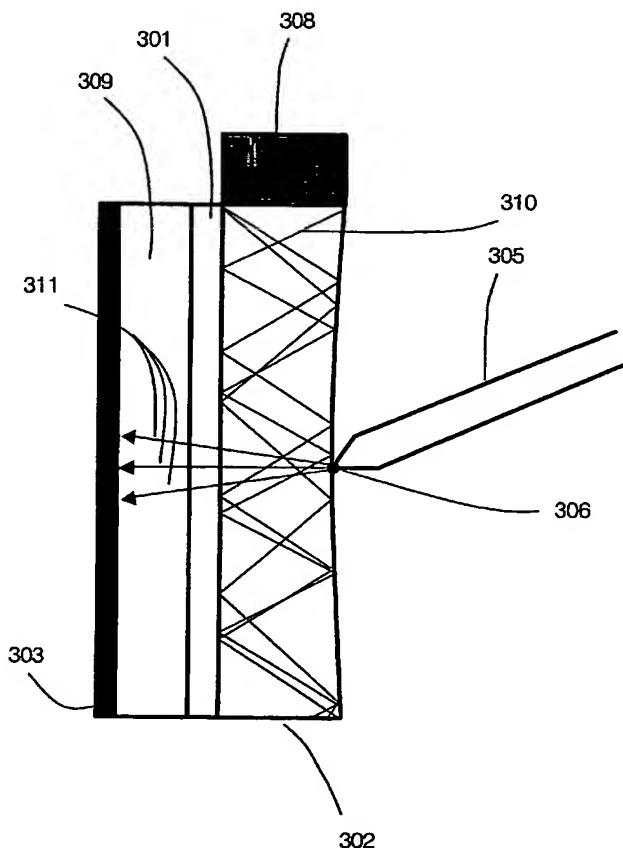

(57) Abstract: The present invention relates to a display device with a detection system for detecting an input position on a screen (301) of the display. A light guide (302) is arranged adjacent to the screen (301). The light guide (302) has a light source (308) arranged to emit light (310) into the light guide (302). The optical matching between the light guide (302) and its surroundings is adapted such that the light (310) of the light source (308) is normally confined within the light guide (302) by means of total internal reflection. However, a user establishing physical contact with the light guide (302) perturbs the state of total internal reflection, and light (310) will be extracted from the light guide (302). In the display device, light detecting means (303) are arranged to detect said light (310) and relate this detection to an input position where the user contact occurred. The display is preferably an LCD, O-LED or P-LED type display.

WO 2005/029394 A2



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.